


TECHNICAL SPECIFICATION BASIC CAR TYRE WARMERS

Description: Tyre warmers for heating bike racing tyres
Outside Fabric: Polyester / PU Treatment
Colour: Black, Blue, Red, Green, Yellow, Orange
Inside Fabric: Black Fireproof Polyester for high temperature
Inner structure: Fireproof Polyester Wadding
 Aluminium-Polyester Sheet as Spreader
 Heating circuit plotted on
Closing: Triple velcro closing
Heating cable: Heating alloy with PTFE insulated. Double coil
Insulation testing voltage: 3000kVac
Heating Temperature: 90°C / 194°F
Temperature Control: TNT (Tyre warmers No Thermostat)
Power Connection and Voltage: EU 230 Vac, US 110 Vac,
 UK 230 Vac, AUS 240 Vac, JP 100 Vac
External cable length: 1.6 m
Package: Polyester Bag for Car (800 gr / 28,2 OZ)

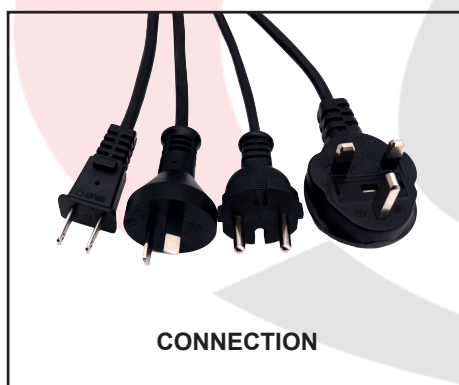

Measures/Size:

Size	Tyre	Rolling circumference	Tread Width	Voltage	Power Consumption	Time to reach 90° / 194 °F	Weight
13"	200/540	1696	200	230-240Vac	-----	-----	-----
				100-110Vac	-----		
13"	200/540	1791	230	230-240Vac	-----	-----	-----
				100-110Vac	-----		
13"	245/660	2073	245	230-240Vac	-----	-----	-----
				100-110Vac	-----		
13"	250/575	1806	250	230-240Vac	-----	-----	-----
				100-110Vac	-----		
13"	250/575	1854	300	230-240Vac	-----	-----	-----
				100-110Vac	-----		
13"	325/660	2073	325	230-240Vac	-----	-----	-----
				100-110Vac	-----		

TECHNICAL SPECIFICATION BASIC CAR TYRE WARMERS

Measures/Size:

Size	Tyre	Rolling circumference	Tread Width	Voltage	Power Consumption	Time to reach 90° / 194 °F	Weight
17"	225/625	1964	225	230-240Vac	-----	-----	-----
				100-110Vac	-----		
17"	245/620	1948	245	230-240Vac	-----	-----	-----
				100-110Vac	-----		
18"	245/645	2026	245	230-240Vac	-----	-----	-----
				100-110Vac	-----		
18"	265/645	2026	265	230-240Vac	-----	-----	-----
				100-110Vac	-----		
18"	265/660	2073	265	230-240Vac	-----	-----	-----
				100-110Vac	-----		
18"	285/645	2026	285	230-240Vac	-----	-----	-----
				100-110Vac	-----		
18"	300/680	2120	300	230-240Vac	-----	-----	-----
				100-110Vac	-----		
18"	305/645	2026	305	230-240Vac	-----	-----	-----
				100-110Vac	-----		
18"	305/660	2073	305	230-240Vac	-----	-----	-----
				100-110Vac	-----		
18"	305/680	2136	305	230-240Vac	-----	-----	-----
				100-110Vac	-----		
18"	310/710	2242	310	230-240Vac	-----	-----	-----
				100-110Vac	-----		
18"	315/680	2136	315	230-240Vac	-----	-----	-----
				100-110Vac	-----		
18"	325/660	2073	325	230-240Vac	-----	-----	-----
				100-110Vac	-----		
18"	325/680	2136	325	230-240Vac	-----	-----	-----
				100-110Vac	-----		
18"	325/705	2215	325	230-240Vac	-----	-----	-----
				100-110Vac	-----		
19"	235/645	2026	235	230-240Vac	-----	-----	-----
				100-110Vac	-----		
19"	255/650	2042	255	230-240Vac	-----	-----	-----
				100-110Vac	-----		
19"	275/675	2121	275	230-240Vac	-----	-----	-----
				100-110Vac	-----		
19"	295/680	2136	295	230-240Vac	-----	-----	-----
				100-110Vac	-----		
19"	305/690	2168	305	230-240Vac	-----	-----	-----
				100-110Vac	-----		
19"	315/705	2215	315	230-240Vac	-----	-----	-----
				100-110Vac	-----		
20"	295/300	2161	295	230-240Vac	-----	-----	-----
				100-110Vac	-----		