

MAMMUTH Rack MANUAL (all)

Recommendations: All capit rack racks must be used and mounted by experienced personnel and may only be used in the "sports competition" field for preheating racing tires. Do not use these products for other purposes in civil and industrial settings. Capit declines all responsibility for any incorrect and/or improper use of the article. The article cannot be wet, turned upside down, Any damage to the product is synonymous with "waste"; The product must be used in accordance with all the necessary safety criteria. The mechanical components used, the electrical, electronic and mechanical components are not manufactured directly by Capit but by subcontractors who guarantee Capit construction criteria in compliance with current regulations.

Each rack is equipped with electrical equipment and cables suitable for the indicated current load: it is not permitted to connect equipment other than the capit tyre warmers.

The electrical and electronic devices mounted on the rack are designed only for racing use for connection of Capit tyre warmers. Not other tyre warmers. Never make any mechanical or electrical modifications. Loss of warranty

Assembly Instructions : The maximum mechanical load for each WHEEL housing must not exceed 20kg.

Use only Capit supply wheel axles and bolts.

Aluminium may be scratched with use, if the groove is not marked, the product can still be used. Do not use the product in case of cracks, cuts, desoldering.

The two feet are inserted inside the central column at the bottom.



Screw the 4 knobs with short thread (top photo)

In the case of larger racks, join the low horizontal bracket and use a fifth short knob (not present in the memmuth 4 rack). Third photo above.

Once the low horizontal bracket and the two side feet are mounted together, fix the vertical posts (photo) using the two-hole joint.

The short knobs will each fix each vertical floor lamp (photo Gracol)

When the vertical posts are fixed to the horizontal bar at the bottom, you can mount the "case" with electrical parts exactly halfway up from the ground (photo). the long M8 knobs are used to secure the CASE with electrical or electronic parts




Now plug in the side cables (1 for mammoth rack 4 only) and connect to the mains. The two side switches light up red.



Once all these operations are finished, you can fix the motorcycle wheels on the stand using only the "wheel pivots" capit (photo below).

Wheel pivots are sized for most wheel hubs found in competitions. However there are different sizes of pivot wheels available, please contact performance@capit.it

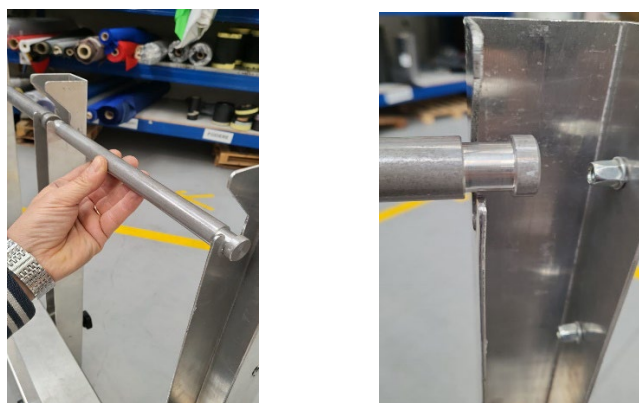

If you choose the rectangular COVER covers in padded material (optional photo below on the right) you will need to Purchase and assemble the "hat" structure first (optional photo below left) the structure provides M6 Allen screws (photo) for the side panels (join the two T-shaped parts if disunited in the package) The 4 small M6 knobs (photo) will be used for the upper transverse uprights.

