


TECHNICAL SPECIFICATION FULL ZONE TYRE WARMERS

Description: Tyre warmers for heating bike racing tyres
Outside Fabric: Polyester / PU Treatment
Colour: Black, Blue, Red
Inside Fabric: Black Nomex
Inner structure: Fireproof Polyester Wadding
 Aluminium-Polyester Sheet as Spreader
 Heating circuit plotted on
Closing: Triple velcro closing
Heating cable: Heating alloy with PTFE insulated. Double coil
Insulation testing voltage: 3000kVac
Heating Temperature: 30-120°C / 86-248°F
Temperature Control: Vision temperature controller mounted on
Power Connection and Voltage: EU 230 Vac, US 110 Vac,
 UK 230 Vac, AUS 240 Vac, JP 100 Vac
External cable length: 1,6 m
Temperature sensor: PT 1000 cl. A
Available Size: M-XL, M-XXL
Package: Polyester Padded bag 50x30x12 (200 gr / 7 OZ)

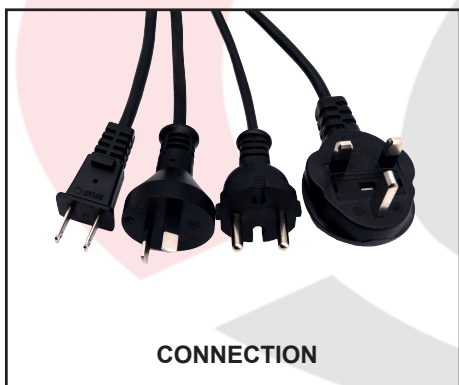

Measures/Size:

Size	Tread Width	Total Width	Lenght	Tyre	Voltage	Power Consumption	Time to reach 120°C/248°F	Weight
M	185mm	310mm	1970mm	≤ 125/17"	230-240Vac	450W	44min	640 gr 22,5 OZ
					100-110Vac	450W		
XL	255mm	390mm	2130mm	< 200/55-17"	230-240Vac	750W	47min	700 gr 24,7 OZ
					100-110Vac	790W		
XXL	275mm	400mm	2180mm	≥ 200/55-17"	230-240Vac	790W	49min	710 gr 25 OZ
					100-110Vac	900W		